
	<b>Document:</b> datasheet <b>Version:</b> 1.0 <b>Status:</b> actual <b>Author:</b> TL <b>Date:</b> 30.11.00 <b>Approved:</b> ro <b>Date:</b> 30.11.00 <b>File:</b> PC	<b>Pick-up MSP 677 Without Plug</b>	 Tel.: +41-62-916 50 30 Fax: +41-62-916 50 35
-----------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------

Reference: Bulletin PTI 3000


Quick information:

Thread size	: 5/8-18 UNF 2A
Material	: Aluminium galvanized, nut stainless steel
Plug connection	: Amphenol connection
Identificationmark	: On the magnetic side only: MSP 677
Speed range	: Up to 7500 Hz continuous
Amphenol plug <b>recomm.</b>	: P/N EC 1110/90°/2 pol. P/N EC 1100/180°/2 pol.




Amphenol connection

Magnetic Pickup with MIL Connector

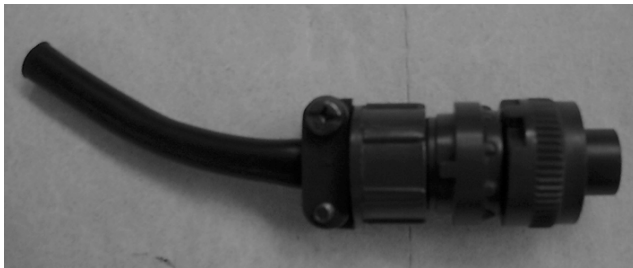

Amphenol EC 1100/180°/2 pol

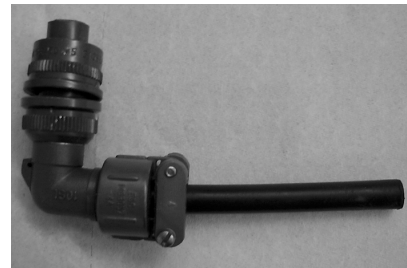

Amphenol EC 1110/90°/2 pol.

Application note: MSP 677 and EC1100 = MSP 679




Engine  
Governing  
Systems

**Document:** datasheet  
**Version:** 1.0  
**Status:** actual  
**Author:** TL **Date:** 30.11.00  
**Approved:** ro **Date:** 30.11.00  
**File:** PC

**Pick-up  
MSP 677  
Without Plug**



HUEGLI TECH LTD  
SWITZERLAND  
Tel.: +41-62-916 50 30  
Fax: +41-62-916 50 35

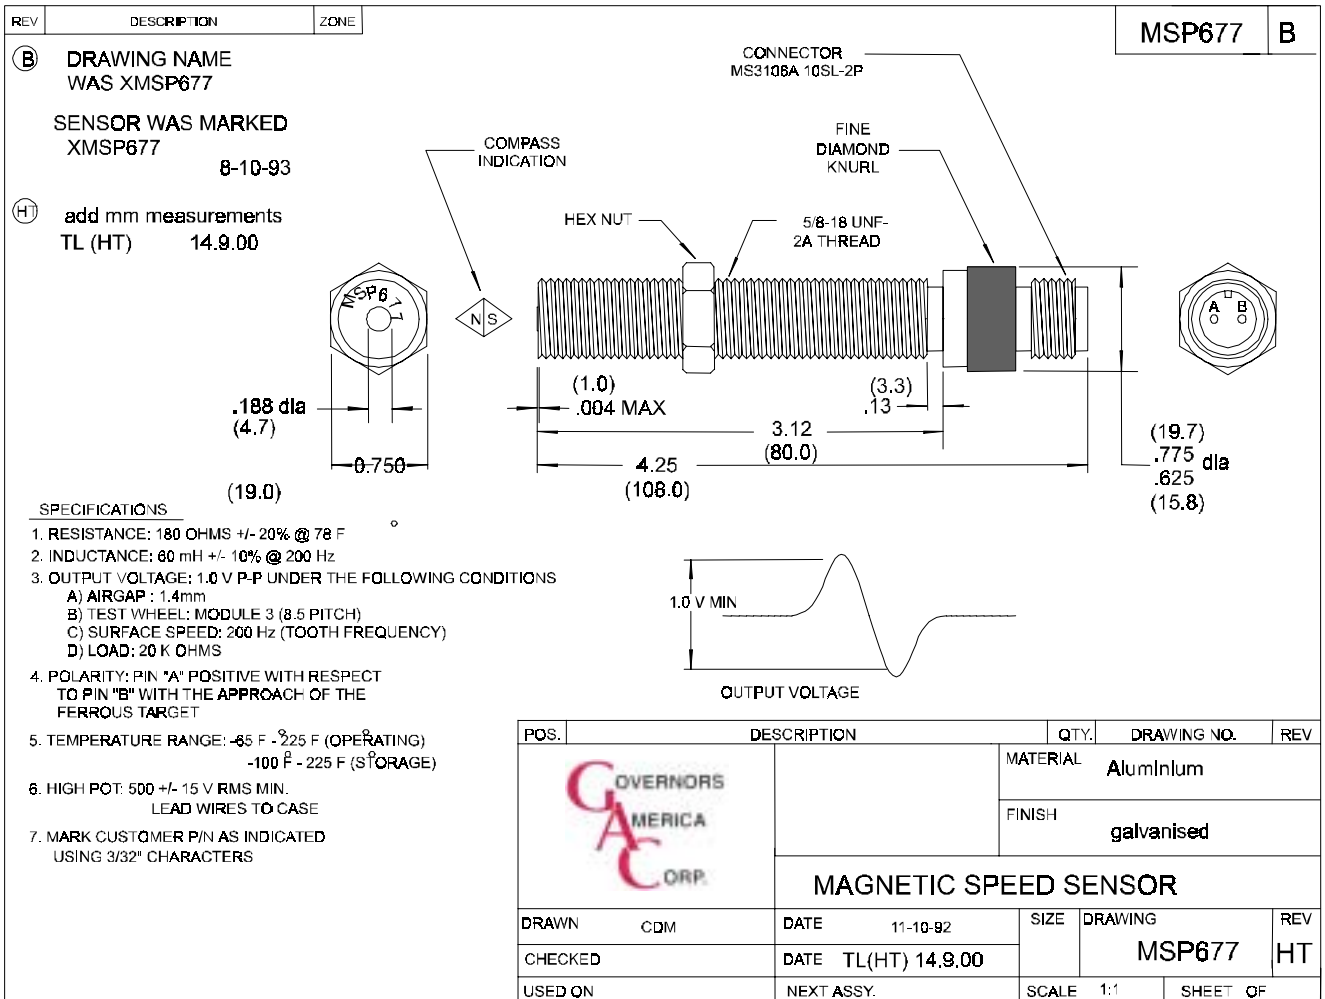

**Note:** - measurements in paratheses are mm  
 - scale in the drawing is not 1:1