



| | | | |
|---|---|---|--|
|  | Document: datasheet Version: 1 Status: aktual Author: TL Date: 30.11.00 Approved: ro Date: 30.11.00 File: PC | Pick-up MSP 678 Without Plug |  Tel.: +41-62-916 50 30 Fax: +41-62-916 50 35 |
|---|---|---|--|

Reference: Bulletin PTI 3000


Quick information:

| | |
|------------------------------|---|
| Thread size | : 5/8-18 UNF 2A |
| Material | : Aluminium galvanized, nut stainless steel |
| Plug connection | : Amphenol connection |
| Identificationmark | : On the magnetic side only: MSP 678 |
| Speed range | : Up to 7500 Hz continuous |
| Amphenol plug recomm. | : P/N EC 1100/180°/2 pol. P/N EC 1110/90°/2 pol. |



Magnetic Pickup with MIL Connector

Amphenol EC 1100/180°/2 pol.

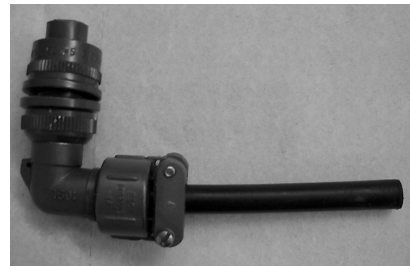

Amphenol EC 1110/90°/2 pol

Application note: MSP 678 and EC 1100 = MSP 6710




Engine
Governing
Systems

Document: datasheet
Version: 1
Status: aktual
Author: TL **Date:** 30.11.00
Approved: ro **Date:** 30.11.00
File: PC

**Pick-up
MSP 678
Without Plug**



HUEGLI TECH LTD
SWITZERLAND
Tel.: +41-62-916 50 30
Fax: +41-62-916 50 35

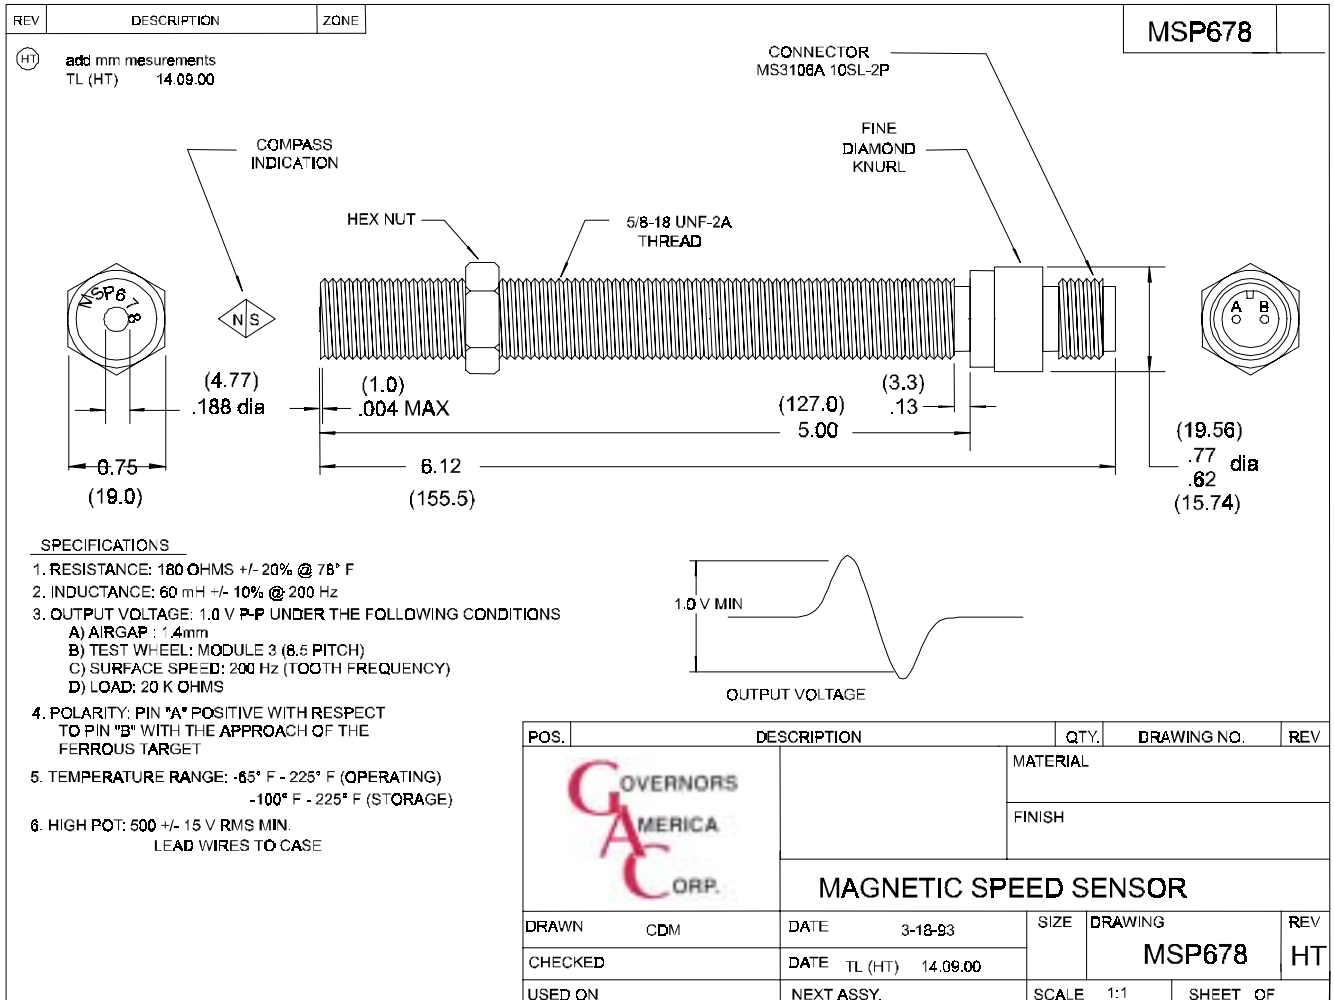

Note: - measurements in paratheses are mm
 - scale in the drawing is not 1:1